

## Lever latches

with recessed key, technopolymer

### MATERIAL

Stator, rotor, closing lever and nut (M22x1.5) in glass-fibre reinforced polyamide based (PA) technopolymer certified self-extinguish UL-94 V0, black colour, matte finish.

### PACKING RING

SBR rubber.

### INTERNAL TOOTHED WASHER

AISI 304 stainless steel.

### SELF-TAPPING SCREW

AISI 304 stainless steel.

### KEY

Polyamide based (PA) technopolymer.

### ROTATION

90°.

### IP PROTECTION

IP 65 protection class according to table EN 60529 (see page A23).

### STANDARD EXECUTIONS

- **CQT/A**: mark for two-wings key.
- **CQT/T**: mark for triangular key.

### TECHNICAL DATA



The "VO" certification in accordance with UL-94 V (Underwriters Laboratories) (see Technical Data on page A5) indicates that on a plastic test sample with specific shape and dimensions, in the vertical position, the flame is extinguished within 10 seconds, without generating incandescent drops.

### SPECIAL EXECUTIONS ON REQUEST

- Cylindrical body of the closing lever in other dimensions.
- Latches and keys supplied separately.



Drilling template

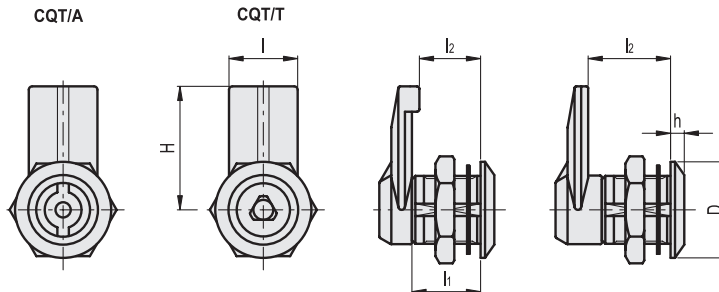

### CQT/A

Code	Description	D	H	l	l1	l2	h	⚖
421393	CQT/A-32-18 AE-VO	28	32	20	20	18	4	20
421391	CQT/A-32-20 AE-VO	28	32	20	20	20	4	20
421395	CQT/A-32-24 AE-VO	28	32	20	20	24	4	21
421397	CQT/A-32-32 AE-VO	28	32	20	20	32	4	23

### CQT/T

Code	Description	D	H	l	l1	l2	h	⚖
421403	CQT/T-32-18 AE-VO	28	32	20	20	18	4	20
421401	CQT/T-32-20 AE-VO	28	32	20	20	20	4	20
421405	CQT/T-32-24 AE-VO	28	32	20	20	24	4	21
421407	CQT/T-32-32 AE-VO	28	32	20	20	32	4	23