

Cabinet U-Handles

Stainless Steel, Hygienic Design

SPECIFICATION

Handle

Stainless steel AISI 316L **A4**

- Matte finish ($Ra < 0.8 \mu m$) **MT**
- Polished finish ($Ra < 0.8 \mu m$) **PL**

Sealing rings

- HNBR **H**
 - Operating temperature $-25\text{ }^{\circ}\text{C}$ to $+150\text{ }^{\circ}\text{C}$
- EPDM **E**
 - Operating temperature $-40\text{ }^{\circ}\text{C}$ to $+120\text{ }^{\circ}\text{C}$
- FKM **F**
 - Operating temperature $-5\text{ }^{\circ}\text{C}$ to $+200\text{ }^{\circ}\text{C}$
- FDA compliant material
- Blue
- Hardness 85 ± 5 Shore A

INFORMATION

Cabinet U-handles GN 429 are intended for use in hygienic areas. The versions with PL finish comply additionally according to the guidelines of the EHEDG and DGV Test guidelines. The sealed mounting surfaces enable fastening without dead spaces. The high quality finish prevents adherence of dirt and facilitates cleaning.



- Operating instruction GN 279

ACCESSORY

- GN 7600 Sealing Rings (see page)

TECHNICAL INFORMATION

- Load Rating Information (see page A35)
- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

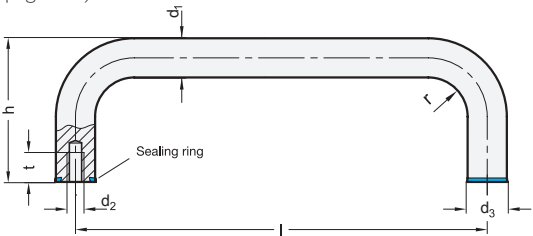

* Complete with

H E F

GN 429-MT

STAINLESS STEEL

Description	d1	l	d2	d3	h	r	t	min.	⚖
GN 429-A4-12-125-MT-*	12	125	M 5	12.8	51	14	12	170	
GN 429-A4-12-160-MT-*	12	160	M 5	12.8	51	14	12	202	
GN 429-A4-12-200-MT-*	12	200	M 5	12.8	51	14	12	240	
GN 429-A4-16-160-MT-*	16	160	M 6	16.8	59	18	12	373	
GN 429-A4-16-200-MT-*	16	200	M 6	16.8	59	18	12	435	
GN 429-A4-16-250-MT-*	16	250	M 6	16.8	59	18	12	520	
GN 429-A4-20-200-MT-*	20	200	M 8	20.8	85	22	15	700	
GN 429-A4-20-250-MT-*	20	250	M 8	20.8	85	22	15	830	
GN 429-A4-20-300-MT-*	20	300	M 8	20.8	85	22	15	950	

Weight Material H

GN 429-PL

STAINLESS STEEL

Description	d1	l	d2	d3	h	r	t	min.	⚖
GN 429-A4-12-125-PL-*	12	125	M 5	12.8	51	14	12	170	
GN 429-A4-12-160-PL-*	12	160	M 5	12.8	51	14	12	202	
GN 429-A4-12-200-PL-*	12	200	M 5	12.8	51	14	12	240	
GN 429-A4-16-160-PL-*	16	160	M 6	16.8	59	18	12	373	
GN 429-A4-16-200-PL-*	16	200	M 6	16.8	59	18	12	435	
GN 429-A4-16-250-PL-*	16	250	M 6	16.8	59	18	12	520	
GN 429-A4-20-200-PL-*	20	200	M 8	20.8	85	22	15	700	
GN 429-A4-20-250-PL-*	20	250	M 8	20.8	85	22	15	830	
GN 429-A4-20-300-PL-*	20	300	M 8	20.8	85	22	15	950	

Weight Material H



NV 24151



TYPE EL
CLASS I AUX
JULY 2024

